






Meet clean, healthy water. Your new Aquasana® whole house Salt-Free Water Conditioner system was expertly engineered to protect internal pipes and plumbing from scale buildup without the use of harsh chemicals or salt.

Enjoy the peace of mind that comes from knowing you're protecting your home's plumbing and extending the life of your washing machine, water heater, dishwasher, and other appliances.

WH-SFWC-S AND WH-SFWC-T

TABLE OF CONTENTS

Box Contents & System Configurations	3
nstallation Steps	
Froubleshooting Guide	13
Maintenance	14
Filter Replacements	5-20
Performance	21
Narranty	22
Nater for Life® Program	23

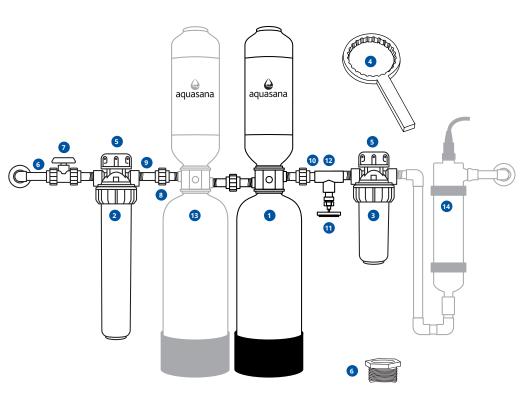

- 1 Salt-Free Water Conditioner tank
- 20" Pre-Filter
- 3 10" Post-Filter
- 4 Plastic Wrench
- 5 Fliter Support Brackets (2)
- 6 1" 3/4" Reducer Bushings (2)
- Shut-Off Valve
- 8 Slip Unions (3)

9 2.5" TOE Nipples (7)

(4" for the Tall Salt-Free Water Conditioner (2))

- 10 3" Smooth Nipple
- 11 Brass Drain Valve
- 12 PVC Tee
- Rhino® Tank (Optional)
- 14 UV Filter (Optional)

Box contents will be packaged in multiple boxes.

Before beginning installation, please ensure all parts listed are present. If any part is missing or damaged, do not attempt to install the system.

Please contact Customer Support for replacement parts at **866-662-6885.**

Tools recommended for installation:

- Drill
- Wrench
- Channel locks
- · Pipe cutter
- · NSF certified PVC primer and glue
- NSF certified plumber's tape
- · Garden hose
- 5 gallon bucket

Optional components:

- · Check valve
- · Pro-Grade Bypass Kit
- Water hammer arrestor
- Copper wire & grounding clamps (if copper pipes are present)
- · Pex tubing, crimp rings and cutter

>> Click here to view the Salt-Free Water Conditioner installation video.

Precautions

- For all installations: Due to the varieties of home design, not all
 configurations can be addressed in this guide. Anticipate the need for
 additional parts and pieces including but not limited to pex tubing, clamps,
 and mounting screws to install unit properly (available at a local home
 improvement store or through your plumbing contractor).
- DO NOT install this conditioner where the line pressure may exceed 100 psi.
 The operating pressure range for this filter is between 20psi 100psi. In areas with high pressure, a pressure relief valve and a water hammer arrestor may be necessary.
- Install on cold water lines only (40° 90°F).
- Installation of the system must comply with existing state and local plumbing codes.
- Some local codes may require the use of a licensed plumber or certified installer when disrupting a potable water line.
- It is recommended your system be installed indoors and out of direct sunlight. Prolonged exposure to light can weaken plastic components, resulting in housing failure. If this is not possible and the system is outdoors or in a sunny area, the unit must be protected from both direct sunlight and freezing temperatures.
- Unit must be installed in an area where the main water line enters your home, before connecting to the water heater. DO NOT install after a water heater or on the hot water line.

Precautions (continued)

- DO NOT install the tank on its side. It must be installed upright to maximize contact with media bed.
- Pick an appropriate installation location where if the tank or any connection thereto should leak, the resulting flow of water will not cause damage to the surrounding area. Dimensions of systems vary—always allow an estimated minimum of 46" clearance for height of the Standard Salt-Free Water Conditioner tank, an estimated minimum of 57" clearance for height of Tall Salt-Free Water Conditioner tank, and a minimum of 44" for floor space.
- Conditioner tank must be flushed before running water from system into house.
- NSF certified plumber's tape (thread sealing tape) is the only sealer that
 can be used on threaded fittings. DO NOT use pipe dope or PVC primer/glue
 on threaded fittings. Exposure to these compounds will damage nipples
 causing leaks.
- · Properly tighten all fittings to ensure a leak-free assembly.
- If installing on metallic plumbing, two grounding clamps and #4 copper wire are essential for safety.
- It is strongly recommended to install a check valve at the end of your system configuration and before the water heater to protect your system from back flow.

1 Select Location

Lay out system in appropriate configuration. Improper sequencing of equipment will affect performance, and could possibly damage your system.

Pick an appropriate installation location. Unit must be installed in an area
where the main water line enters your home, and before it connects to the
water heater. It is recommended to install after any outdoor hose bibs or
irrigation lines to avoid using conditioned water where not needed.


DO NOT install after the water heater or on the hot water line.

Choose the location for a shut-off valve to be able to isolate your system. If installing a check valve, it should be installed after your system but before the water heater.

Prepare Salt-Free Water Conditioner

- 1. Ensure the Salt-Free Water Conditioner tank sits level. If it looks off-center or unlevel, reference the <u>troubleshooting section</u>.
- Pre-assemble all parts and dry-fit the entire system to ensure proper spacing and to confirm you have the necessary components for installation. Reference system configuration image on page 3 to understand the system layout and connections.
- 3. Connect all smooth fitting connections using NSF certified primer and glue. Smooth connections will be on the nipples, unions, shut-off valve, and PVC tee. Once glue is applied, press and hold the connection tight for 10-15 seconds.
- 4. Carefully remove shipping caps from inlet and outlet ports without damaging valve threads.
- 5. Wrap threaded nipple ends 3 times with NSF certified plumber's tape. Insert the nipples and attached unions to the filtration tank's threaded inlet and outlet. Hand tighten and then tighten again with a pipe wrench (2-2.5 rotations) to seal the connections.


NOTE: DO NOT OVER-TIGHTEN. If space does not allow for a pipe wrench to grip the nipples, clamp to the glued union to make final rotations.



(3)

COPPER PIPES ONLY (proceed to Step 4 for all other pipes)

When installing on metallic plumbing, ensure you take the following precautions. Securely install two (2) grounding clamps and a #4 copper wire (not included) across the location where the system will be installed. Tightly clamp at both ends, as shown in the illustration.



AWARNING



ELECTRICAL SHOCK HAZARD

Prior to installation on metallic plumbing, securely install two grounding clamps and a #4 copper wire per installation instructions. Failure to follow these instructions can result in death or electric shock.

(4) Install Shut-off Valve and Ensure Spacing

NOTE: You may need additional components to connect your system to the main water line where it enters and exits the system. Ensure you have all components needed before proceeding to the next steps.


1. Turn off the main water source. Drain water from lines to relieve pressure by turning on a faucet at the lowest elevation inside your home.

NOTE: Installation could take 1–4 hours to complete. Plan accordingly as you will be without water throughout the home during this time.

- Using a pipe cutter, cut into the main water supply line and catch any remaining water in the 5-gallon bucket. Each system includes a 1" PVC shut-off valve with the option of threaded or smooth connections, as well as reducer bushings to connect to a ³/₄" main water line.
- 3. Loosely fit shut-off valve to calculate the proper spacing of components.
- 4. Measure distance for Pre- and Post-Filter, and optional add-ons and mark pipe accordingly.


NOTE: DO NOT cut more pipe than necessary. You can cut more pipe later if needed.

Ensure proper spacing to fit Pre and Post-Filters, and any optional add-ons

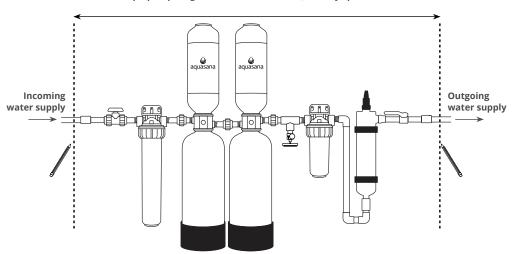

5 Cut Pipes

Cut pipe along the marked sections from step 4 and clean ends of pipe. Ensure there are no burrs, sharp edges, or deep scratches.




NOTE: Cut tubing as straight as possible with a utility knife, or an appropriate pipe cutter for copper, PVC, or PEX tubing.

6 Assemble Drain Valve


NOTE: All threads are NPT tapered pipe threads.

 Using PVC primer and glue, assemble the piping as shown to the right (Figure 1), applying primer and glue. Ensure enough glue cure time before running water through the system.




2. Wrap the 1/2" male drain end 2-3 times with plumber's tape (Figure 2).

3. Hand tighten the drain valve into the 1/2" female threaded tee. Then, tighten 1-2 more turns with a wrench (Figure 3).



NOTE: DO NOT OVER TIGHTEN. There should be a gap between the drain valve threads and tee. Tightening the 1/2" brass drain valve more than 2 turns with a wrench can cause the tee to crack.



Configure System

- 1. Fit Salt-Free Water Conditioner tank and additional optional add-ons into the system at this time.
- 2. Attach the shut-off valve to your incoming water line.
- 3. Connect the threaded nipple from the shut-off valve outlet to the 20" Pre-Filter housing inlet with NSF certified plumber's tape.
- 4. Attach the filter wall bracket to the Pre-Filter housing with included screws. Once this is complete, screw the support bracket to the wall.


NOTE: Additional materials may be needed to ensure Pre-Filter and Post-Filter brackets are supported and properly secured to wall.

- Ensure all parts are flowing through the "IN" port in the correct direction of water flow.
- 6. Connect the threaded nipple from the Pre-Filter outlet to the union that is attached to the Salt-Free Water Conditioner tank inlet.
- 7. Using the drain valve assembly from step 6, connect the drain valve assembly to the union attached to the Rhino® tank outlet as well as the Post-Filter inlet with included nipples.
- 8. Attach the Post-Filter bracket and housing to the wall, similar to the Pre-Filter, and ensure all connections are tight.
- 9. If you have additional attachments, please reference those manuals before the final installation.
- 10. Once installation is complete, allow proper time for the glue to dry according to manufacturer instructions.

8 Flush Your System


NOTE: It's imperative that this system is flushed properly prior to system water entering your house.

- 1. Connect a garden hose to the integrated drain valve and ensure the drain valve is in the open position.
- 2. Ensure the garden hose outlet is directed towards a floor drain or outdoor area.
- Slowly turn the water on from the initial shut-off valve and inspect for leaks. If any leaks are detected, refer to the troubleshooting section. If no leaks are detected, proceed with the flushing process.
- 4. Slowly turn the water on and allow discolored water to flow from the drain valve into a suitable drainage area.

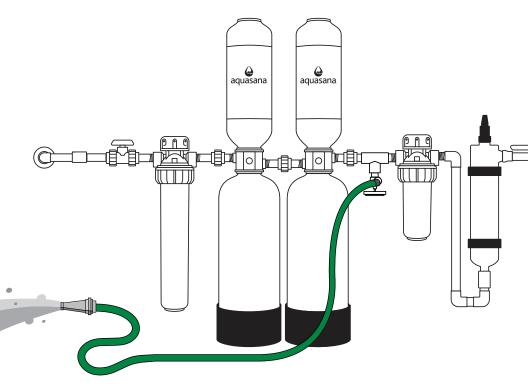

8 Flush Your System (continued)

5. After the initial 15-minute flushing, begin a period of "surge flushing" by turning the water supply on for 30 seconds and then off for 30 seconds, repeating the cycle for 15 minutes or until the initial surge of water is completely clear and free from discoloration and cloudiness.

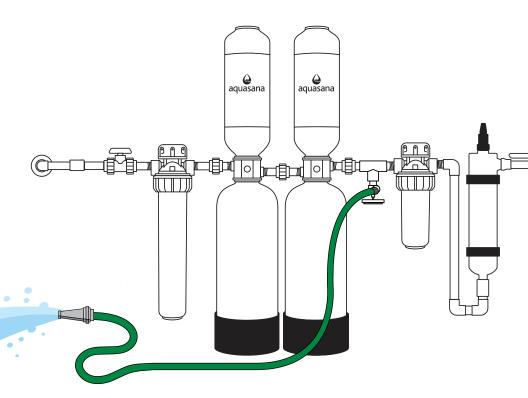

6. Final installation is complete. You may now close off the drain valve.

NOTE: Do not drink flushed water.

Issue	Resolution
Component is missing or arrived damaged.	Call customer service @ 1 (866) 662-6885 option 1, and then option 2, and then option 1. Please have order number, model number, and pictures of damaged packaging and/or damaged unit.
Tank leans to one side or is not level	Lift the tank straight up and tap down on the ground until the tank stands vertically. The bottom of the tank is round and the boot allows the tank to stand upright.
Water leak at seam of tank divider	Valve o-ring may not be placed properly or the top or bottom tank may have loosened during shipping. Use rubber strap wrench to tighten tanks. If leak continues, contact customer service with a pre-recorded video of leak.
Water leak from Aquasana fittings or drain valve	• Ensure tight connection – do not overtighten as that could cause cracks and further leaking.
	 Close the shut-off valve before the leak. Unscrew the closest union and the threaded connection. Remove the previous sealing tape from the fitting and place more sealing tape and or tighten the connection properly.
	Ensure all connections are properly tightened with a wrench – do not over-tighten! If the problem persists, contact customer service with pre-recorded video.
Water leak from pre/post filter housing	• Ensure tight connection – do not overtighten as that could cause cracks and further leaking.
	Tighten the housing further with the included wrench.
	If leak persists, close the shut-off valve before the leak. Remove housing and filter. Clean o-ring, inside the housing, and all threaded connections. Re-lubricate the o-ring and reassemble it with a new filter.
	• If a crack is visible and/or other methods do not stop the leak, contact customer service.
Reduced water pressure after installation	It is recommended that the sediment pre-filter be replaced every 2 months depending on the amount of sediment in your water supply. If the system has been working properly and the pressure is slowing, it may be time to change the sediment filter. Check the sediment filter and replace if necessary.
Water appears gray or cloudy	Let air flush from water lines. Cloudy water will dissipate over time (can take a week to a month) and is completely harmless.
Taste/odor of water did not improve	Ensure bypass loop is turned off and system shut-off valves are open.

Cleaning

- The exterior of your filtration system can be cleaned with warm, soapy water. **Do not use any abrasive solution.**
- · Rinse well with clean water.

NOTE: Never use chemical cleaning products on the system's exterior surface as they may damage the housing.

Pre/Post-Filter Replacements

Whole House 20" Pre-Filter Cartridge Replacement

Replace every 2 months. Replace sooner if there is a noticable decrease in water flow through the filter system.

Whole House 10" Post-Filter Cartridge Replacement

Replace every 6 months. Replace sooner if there is a noticable decrease in water flow through the filter system.

Pre/Post-Housing Replacement

Replace every 5 years. To replace, call Customer Support.

How to change the Pre/Post-Filters:

 Shut the filter system off at the shut-off valve A. Place a 5 gallon bucket under the system drain valve and open valve. This will relieve water pressure and drain excess water.



- 2. Remove the blue filter housing by turning the lower ring to the right, using the wrench supplied with your filter system. Remove the used filter.
- 3. If necessary, clean the inside of the blue filter housing with mild soapy water, rinse and dry.
- 4. Place new filter in the center of the blue filter housing.
- 5. Clean the housing o-ring and relubricate it with silicone grease. Set the o-ring into the proper groove and reattach the housing by screwing it back onto the top piece.

NOTE: DO NOT USE PETROLEUM JELLY as lubrication on the system or o-rings.

- 6. After reassembly, turn the system back on at the shut-off valve.
- 7. Run water, with the bucket still under the Pre-Filter. Check for leaks.

Specifications

This system is designed and tested for use with genuine Aquasana parts including replacement filters and all hardware. Use of parts from other manufacturers may result in loss of contaminant reduction performance, system damage, or failure. Use of parts from other manufacturers will also void your warranty. For replacement parts, please visit aquasana.com.

Model: WH-SFWC-S and WH-SFWC-T System Replacements

20" Pre-Filter: EQ-303-20 10" Post-Filter: EQ-PFC.35

Standard Salt-Free Conditioner: WH-SFWC-SR Tall Salt-Free Water Conditioner: WH-SFWC-TR

Salt-Free Water Conditioner Tank Replacement

1 Shut Off Water Supply

- 1. Turn off the main water source prior to tank replacement or turn off the shut-off valve.
- 2. Place a 5 gallon bucket under the system drain valve and open valve. This will relieve water pressure and drain excess water.

NOTE: You must relieve the pressure in your system before attempting to change the Salt-Free Water Conditioner tank.

AWARNING




ELECTRICAL SHOCK HAZARD

If you have copper pipes - leave your grounding clamps installed. Do not disconnect at any time while changing the tank. Failure to follow this instruction can result in death or electric shock.

(2) Remove Tank from System


- 1. Loosen the unions on both sides of the Salt-Free Water Conditioner tank. Slide the entire tank (pipe nipples and halves of unions included) away from the system.
- 2. Unscrew the pipe nipples from the tank.
- Dispose of the old Salt-Free Water Conditioner tank properly.



Salt-Free Water Conditioner Tank Replacement (continued)

3 Reconnect Fittings

- 1. Clean the threads on the pipe nipples and re-apply new NSF certified plumbers tape.
- 2. Connect pipe nipples to your new Salt-Free Water Conditioner tank.




aguasana.

aquasana.

4 Plumb In New Salt-Free Water Conditioner Tank

Slide the new tank back into the system and re-attach the unions.




Salt-Free Water Conditioner Tank Replacement (continued)

NOTE: It's imperative that this system is flushed properly prior to system water entering your house. The granular carbon used in the filtration tank contains fines that must be flushed out prior to use.


(5) Flushing New Salt-Free Water Conditioner Tank

- 1. Connect a garden hose to the integrated drain valve and ensure the drain valve is in the open position.
- 2. Ensure the garden hose outlet is directed towards a floor drain or outdoor area. If a bypass loop is installed, ensure each shut-off valve is in a closed position.
- 3. Slowly turn the water on from the initial shut-off valve and inspect for leaks. If any leaks are detected, refer to the <u>troubleshooting guide</u> on page 13. If no leaks are detected, proceed with the flushing process.
- 4. Slowly turn the water on and allow discolored water to flow from the drain valve into a suitable drainage area. The first few gallons will appear black and cloudy due to carbon fines.

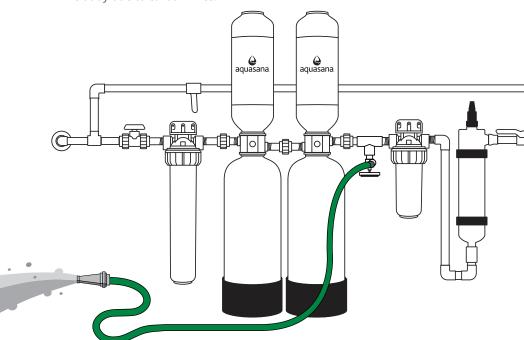

(5) Flushing Process (continued)

5. After the initial 15-minute flushing, begin a period of "surge flushing" by turning the water supply on for 30 seconds and then off for 30 seconds, repeating the cycle for 15 minutes or until the initial surge of water is completely clear and free from discoloration and cloudiness.

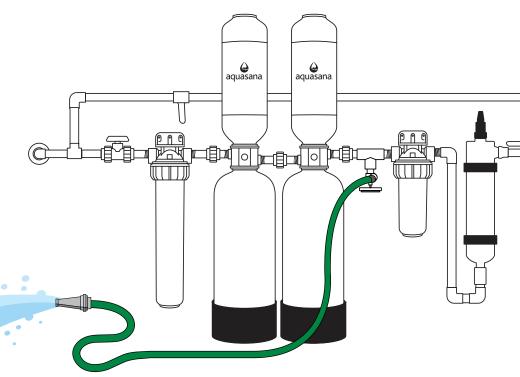

6. Final installation is complete. You may now close off the drain valve and enjoy filtered water throughout your home.

NOTE: Do not drink flushed water.

Model	Replacement	Rated Capacity
WH-SFWC-S	WH-SFWC-SR	1,000,000 gallons 3,785,411.78 liters
Operating Temp. Range	Operating Pressure Range	Rated Flow
40-90°F 4.44-32.2°C	20-100 psi 138-690 kPa	7.0 gpm 26.5 lpm

Manufactured by: Aquasana, Inc.

6310 Midway Road · Haltom City, Texas 76117 866-662-6885

Model	Replacement	Rated Capacity	
WH-SFWC-T	WH-SFWC-TR	1,000,000 gallons 3,785,411.78 liters	
Operating Temp. Range	Operating Pressure Range	Rated Flow	
40-90°F	20-100 psi	7.0 gpm	
4.44-32.2°C	138-690 kPa	26.5 lpm	
Manufactured by: Aquasana, Inc.			

6310 Midway Road · Haltom City, Texas 76117 866-662-6885



Salt-Free Water Conditioner **Limited Warranty**

WHO IS COVERED

AQUASANA AND ITS SUPPLIERS, (herein collectively referred to as "Manufacturer") warrants to the owner of the home where the water filter is initially installed (hereinafter "Owner"). The warranty is restricted to the water filter used in a single-family residence in the United States of America and is void if moved from the original installation location. Registration of the product is not required to receive warranty coverage as specified in this document. WHAT IS COVERED

This Warranty covers defects in materials or workmanship during the limited warranty period of your of your Aquasana Rhino Whole House Filtration System including sub-components purchased with original system (may or may not include pre-filter, postfilter, and fittings), except as provided below. The water filter is warranted only when it is installed, operated and maintained in accordance with the instructions accompanying the water filter found on Aguasana.com. A water filter should be installed in such a manner that, if the tank or any connection thereto should leak, the resulting flow of water will not cause damage to the area in which it is installed. For detailed instructions read the manual accompanying the water filter and review drawings in the manual. If you purchased from an Aquasana-authorized reseller or dealer, proof of purchase is required.

FOR HOW LONG

This warranty runs for months specified in chart below from the date of purchase by a consumer (herinafter "Warranty Period"). No warranty coverage will be provided if the claimant is unable to provide proof of purchase. Water conditions and use rates may limit the functional lifespan of your filter. This Limited Warranty does not extend to the full estimated life span of the filter.

WHAT AQUASANA WILL DO

- 1. If necessary, the Manufacturer will provide a replacement that fulfills the remaining estimated lifespan/capacity (see chart) of your original purchase and send it to you with installation instructions. If industry standards, product improvements or product obsolescence prohibit Manufacturer from furnishing an identical model replacement water filter under this warranty, the Owner will be furnished with a new water filter of comparable remaining capacity and functionality; however, the Owner will be charged for the additional value of the item(s) which Manufacturer has incorporated in the replacement water filter.
- 2. Component Part If any component part proves to Manufacturer's satisfaction to be defective in material or workmanship within the warranty period listed on the data plate label, the Manufacturer will furnish the Owner with a replacement for the defective part(s).
- 3. Return of Defective Water Filter and Component Parts -Manufacturer reserves the right to examine the alleged defect in the water filter or component part(s), and it will be the Owner's obligation to return the water filter and/or component part(s) to the Manufacturer at the Manufacturers request.
 - a. When returning a water filter, it must include all component parts.
 - b. When returning component part(s), they must be individually tagged and identified with the water filter's model number, date of purchase, and date of installation.

WHAT IS NOT COVERED

- 1. This Warranty applies only to products purchased from authorized Aguasana resellers.
- 2. This warranty does not cover filter cartridges and any systems that were not installed in compliance with the instructions or that have been abused or operated incorrectly. This Warranty applies only to products purchased from Aquasana or an Aquasana-authorized reseller or dealer.
- 3. Except when specifically prohibited by the applicable state law, the Limited Warranty stated herein is in lieu of any and all warranties, express or implied (whether written or oral), including, but not limited to, the implied warranties of merchantability and fitness for a particular purpose.
- 4. Except when specifically prohibited by the applicable state law, the Manufacturer shall not be liable for any incidental, consequential,

special, or contingent damages or expenses, arising, directly or indirectly, from any defect in the water filter of the use of the water

- 5. Manufacturer shall not be liable for any water damage arising, directly or indirectly, from any defect in the water filter or component part(s) or from its use.
- 6. Manufacturer shall not be liable for any damage or product failures caused by any of the following:
 - The water filter or any of its component parts have been subject to misuse, alteration, neglect or accident.
 - · The water filter has not been installed in accordance with the applicable local plumbing and/or building code(s) and/or regulations or in their absence.
 - The water filter is not installed, operated and maintained in accordance with the printed Manufacturer's instructions, including if the water filter has any additional aftermarket equipment introduced into the sealed system not approved by the manufacturer.
 - The water filter is exposed to highly corrosive conditions.
 - · The water filter is not continuously supplied with potable water.
 - · The water filter is not operated within the factory calibrated temperature limits.
 - The water filter is removed from its original installation location.
 - The water filter is installed in direct sunlight or exposed to freezing temperatures.
 - · The water filter or any of its component parts fail due to iron or sediment build-up
 - · Clogging due to purchaser's failure to replace the Pre-Filter cartridge.
 - · Damage caused by fire, flood or acts of God.
 - · Damage caused by over-pressurization in the water line.
- 7. This warranty does not cover damage caused by the use of parts that are not genuine Aguasana parts. This includes, but is not limited to replacement filters, faucets, and/or diverter valves.
- 8. Except when specifically prohibited by the applicable state law, the Owner, and not the Manufacturer, shall be liable for and shall pay for all charges for labor or other expenses incurred in the removal, repair or replacement of the water filter or any component part(s) claimed to be defective or any expense incurred to remedy any defect in the product. Such charges may include, but are not necessarily limited to:
 - a. All freight, shipping, handling and delivery costs of forwarding a new water filter or replacement part(s) to the owner.
 - b. All costs necessary or incidental in removing the defective water filter or component part(s) and installing a new water filter or component part(s).
 - c. Any material required to complete, and/or permits required for, installation of a new water filter or replacement part(s),
 - d. All costs necessary or incidental in returning the water filter or component part(s) to a location designated by the
- 9. This warranty provides specific legal rights and limitations, but you may have other rights under applicable state law.

HOW TO GET SERVICE

To receive service under this Warranty, you must contact Aquasana (A. O. Smith Water Treatment (North America), Inc.) at 1-866-662-6885 or support@aquasana.com within the Warranty Period to describe the problem to a customer service representative who will verify that the product is under warranty and determine whether a part or the system will be replaced and whether you must send back the unit. You will be required to provide both proof of purchase and proper installation.

HOW STATE LAW APPLIES

This Warranty gives you specific rights and you may have other rights which vary from state to state.

Salt-Free Water Conditioner System Warranty Coverage			
Model	Lifespan/Capacity		
WH-SFWC-S	10 years / 1,000,000 gallons		
WH-SFWC-T	10 years / 1,000,000 gallons		
Installation Kit (includes fittings purchased with original system)	12 months		
Pre- and Post-Conditioner Housing Units	12 months		



Protect your investment and save money with Water for Life®.

Our Water for Life® program helps you protect the investment you've made in your family's health with an extended limited warranty on your new filtration system, a 15% discount on replacement filters, and free shipping.



Extended Limited Warranty

Our performance promise to you – free replacement parts when needed.*



Free Shipping

Replacements shipped to you right when you need them – at no extra cost.



Discounted Replacements

The only way to lock in a 15% discount on replacement filters.



No Contract

Free to join and cancel anytime – no long-term commitment required.

CONTACT US TO LEARN MORE



866-275-2319



waterforlife@aquasana.com

^{*}Exclusions apply. Limited Warranty details are available at aquasana.com. Benefits are for the term of Water for Life membership.





LOVE IT?

Please let us know with a review on Aquasana or your retailer's website.



NEED HELP?

Give us a call at **866-662-6885** and tell us what's going on.